

“ROP Safe” foam padding

The latest in Roll Bar padding protection




- Specially profiled Closed-Cell polyethylene foam
- Designed to fit any Roll Bar design with tube dia 44.45mm — Push fit & secure with cable ties
- Product profile and density “fit for purpose”
- Easy to install & trim. Neat fit around bends and weld sections
- Standard colour black - other colours available on request
- Conforms to VSB14 & ADR03/02 Energy Dissipation tests.
- Easy and economical to replace when and if required
- Available Australia wide from nominated Distributors and Motor vehicle accessory outlets

Customised Stamping Available

We have the capabilities of stamping our products and incorporating a contrasting colour for promotional purposes, as shown below. We can design any company logo or particular text upon request.



Density	97 ± 2 kg/m ³
Length	915 mm
ID	44 + 0/-2mm
Impact thickness	29 ± 1 mm
Side thickness	20 mm (nominal)
Internal channel section	20 mm
External channel section	35 mm
Groove depth	13 ± 1 mm

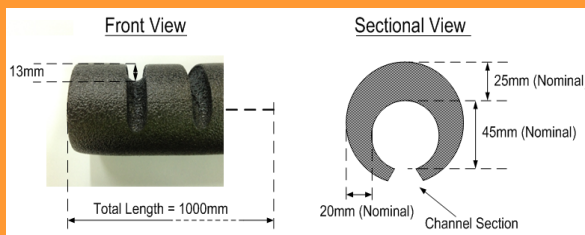

Thermotec Australia Pty Ltd

168 Carrington Street

Revesby, NSW 2212

Office : 02 97716400

Fax : 02 97716466



www.thermotec.com.au